

Blackmagic Streaming Encoder HD



Blackmagic Streaming Encoder HD is powerful self-contained streaming processor with H.264 streaming in 720p, 1080i and 1080p HD via SRT or RTMP protocols. Stream directly to services such as YouTube, Facebook, X and more. Plus you can stream to the internet using Ethernet or connect a 5G or 4G phone to use mobile data. Includes USB webcam, standards converted 12G-SDI input and streaming monitoring output.

\$569

Connections

SDI Video Inputs

1

SDI Loop Outputs

1

SDI Monitor Outputs

1

SDI Rates

1.5G, 3G, 6G, 12G

HDMI Monitor Outputs

1

SDI Audio Inputs

16 channels embedded audio.

SDI Audio Outputs

16 channels embedded audio on Loop Out.

HDMI Audio Outputs


2 channels embedded audio on Monitor Out.

Webcam Output

1 x USB-C up to 1080p60

Ethernet

Ethernet supports 10/100/1000 BASE-T for live streaming, configuration and software updates.

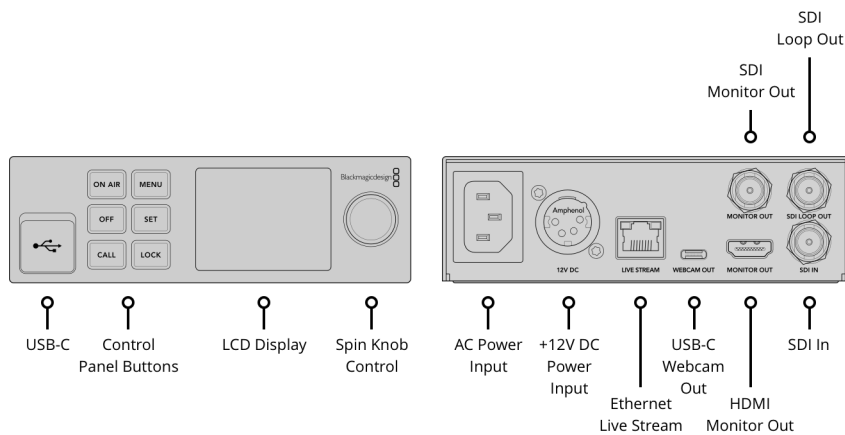

Standards

HD Video Input Standards

720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60,

Ultra HD Video Input Standards

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30, 2160p50, 2160p59.94, 2160p60

SDI Compliance

SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M level A and B, SMPTE 2081-1, SMPTE 2081-10, SMPTE 2082-1, SMPTE 2082-10, SMPTE 2084 and SMPTE 2108-1.

Video Input Color Space

Rec. 709, Rec. 2020

3G SDI

Auto detects SMPTE level A or B on SDI input.

SDI and HDMI Monitor Out Video Standards

1080p50, 1080p59.94, 1080p60

Video Streaming Standards

720p25, 720p30, 720p50, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60.

Streaming

Direct Streaming

Blackmagic Streaming Encoder HD supports direct live streaming over ethernet using Real Time Messaging Protocol (RTMP) in H.264, and Secure Reliable Transport (SRT) in H.264 and H.265.

Closed Captions

Blackmagic Streaming Encoder HD supports embedding CEA-608 and CEA-708 closed captions in your live RTMP stream.

Timecode

Support source timecode over RTMP and SRT streams.

Control

Control Panel

Built in control panel including 6 buttons, spin knob control and 2.2 inch color display.

Device Control

Front panel, USB-C or Ethernet.

External Control

Supports remote camera control, color corrector, tally and talkback. REST API over Ethernet for external control via HTTP when used with REST client applications.

Displays

Built in 2.2 inch LCD for monitoring video, audio and status plus menu settings.

Software

Compatible Services and Software

Facebook, Twitch, YouTube, Twitter,
Restream.IO, Vimeo, BoxCast, CastR,
AfreecaTV, Bilibili, DouYu, Weibo,
Zoom, Skype, Microsoft Teams,
QuickTime Player, FaceTime,
OBS Studio, Open Broadcaster, VLC,
Wirecast Play,
Wowza Streaming Engine.

Operating Systems



Mac 14.0 Sonoma,
Mac 26.0 Tahoe or later.



Windows 10, 64-bit.
Windows 11.



Linux



Chrome OS

Power Requirements

Power Supply

1 x Internal 100 - 240V AC.

12V DC Input

1 x 4-pin XLR for +12V DC input for
external power supply or battery use.

Power Usage

21 W

Physical Installation

Physical Installation

One third rack unit width, 1 rack unit height.

Physical Specifications



Environmental Specifications

Operating Temperature

0° C to 40° C (32° - 104°F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic Streaming Encoder HD
Welcome wallet with QR code for
software download

Warranty

3 Year Limited Manufacturer's
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller